

Figure 1: Two-node system with generator, transmission line, transformer and load.

SUBSTITUTE SHEET (RULE 26)

BEST AVAILABLE COPY


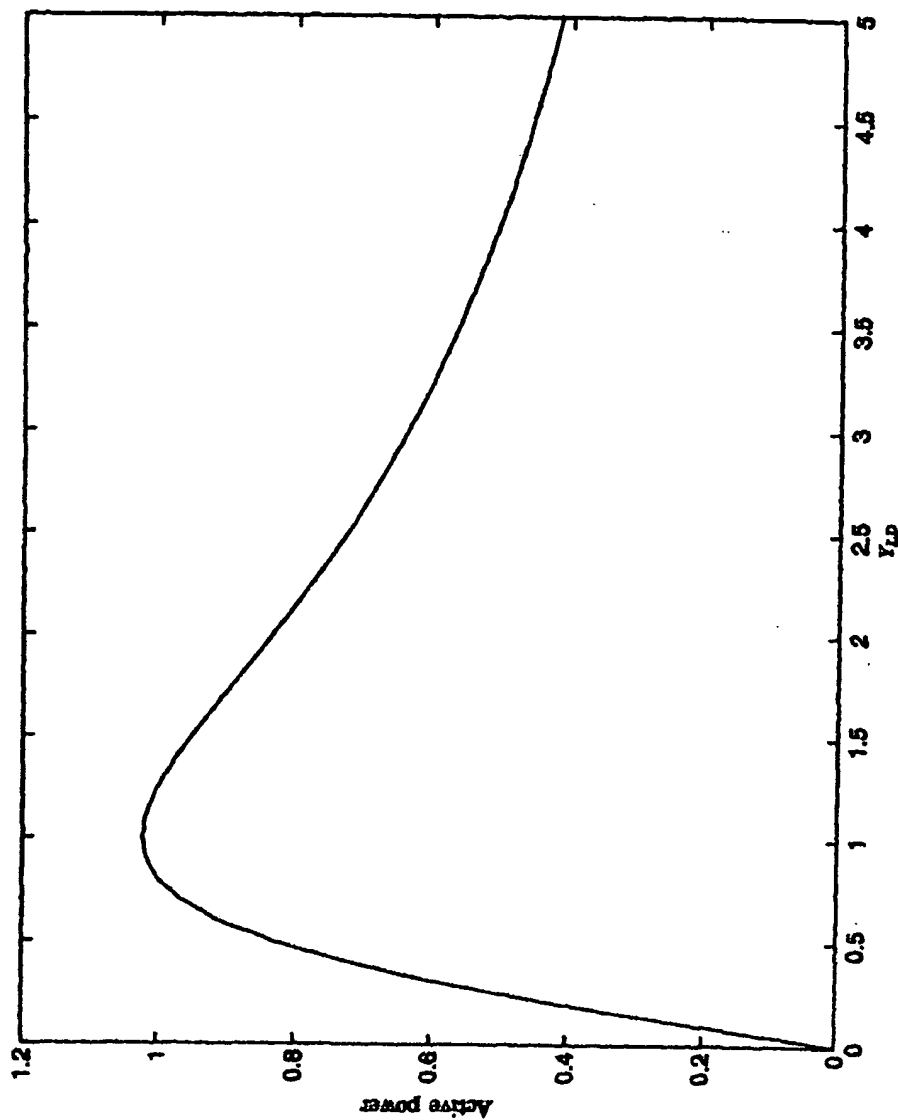


Figure 2: Active power with respect to load impedance. For a particular impedance the transferred active power reaches a maximum.

SUBSTITUTE SHEET (RULE 26)

BEST AVAILABLE COPY

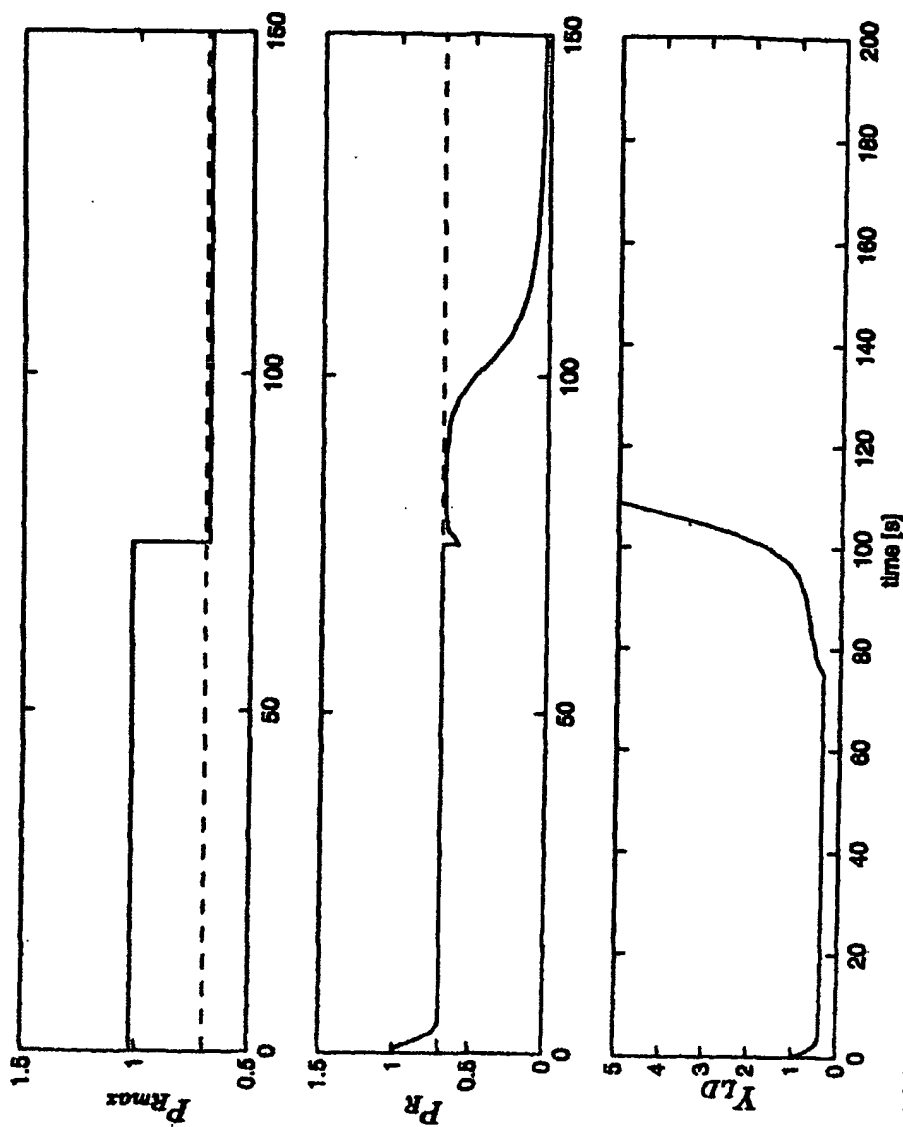

SUBSTITUTE SHEET (RULE 26)

Figure 3: Instability in a two node system with recovery mechanism in the load. A fault is simulated at $t=75$ by increasing the line impedance. The load is trying to achieve the desired active power 0.7 (dashed line) by decreasing its impedance. Since the maximum achievable active power is just below 0.7, the system becomes unstable and will increase to infinity.

BEST AVAILABLE COPY


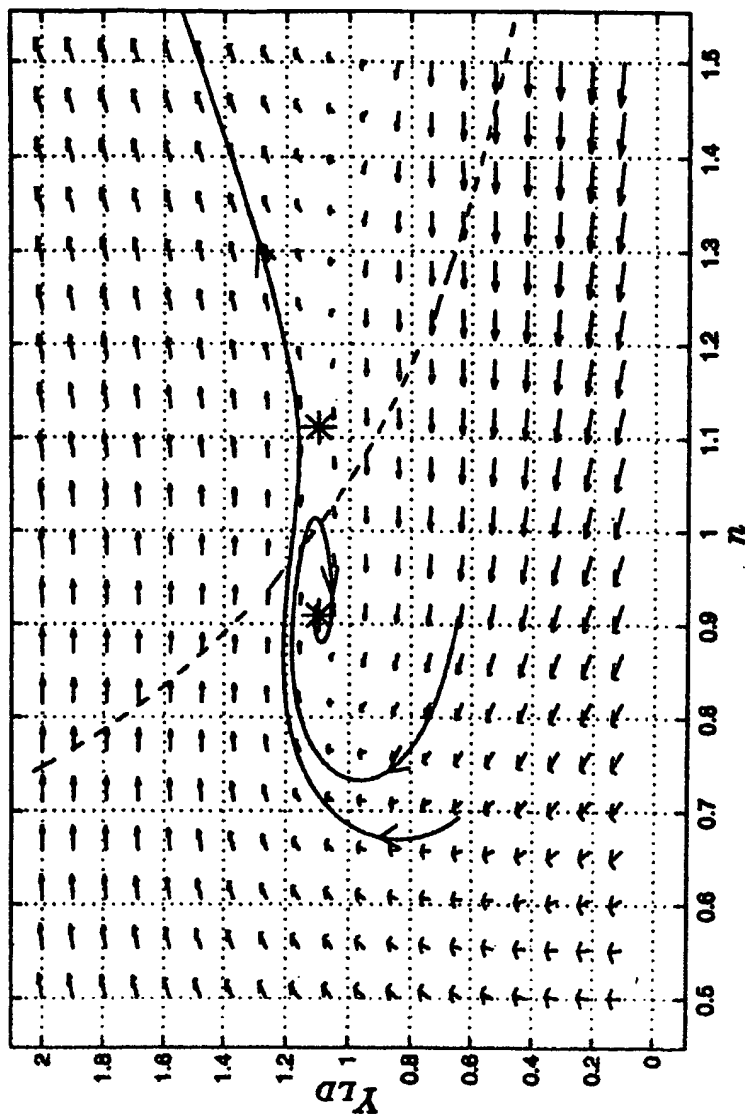


Figure 4: Vector field for the design model consisting of eqs. (1) and (2). The asterisks mark the two equilibrium points. The dashed curve is the loci for maximum power transfer, .

SUBSTITUTE SHEET (RULE 26)


BEST AVAILABLE COPY

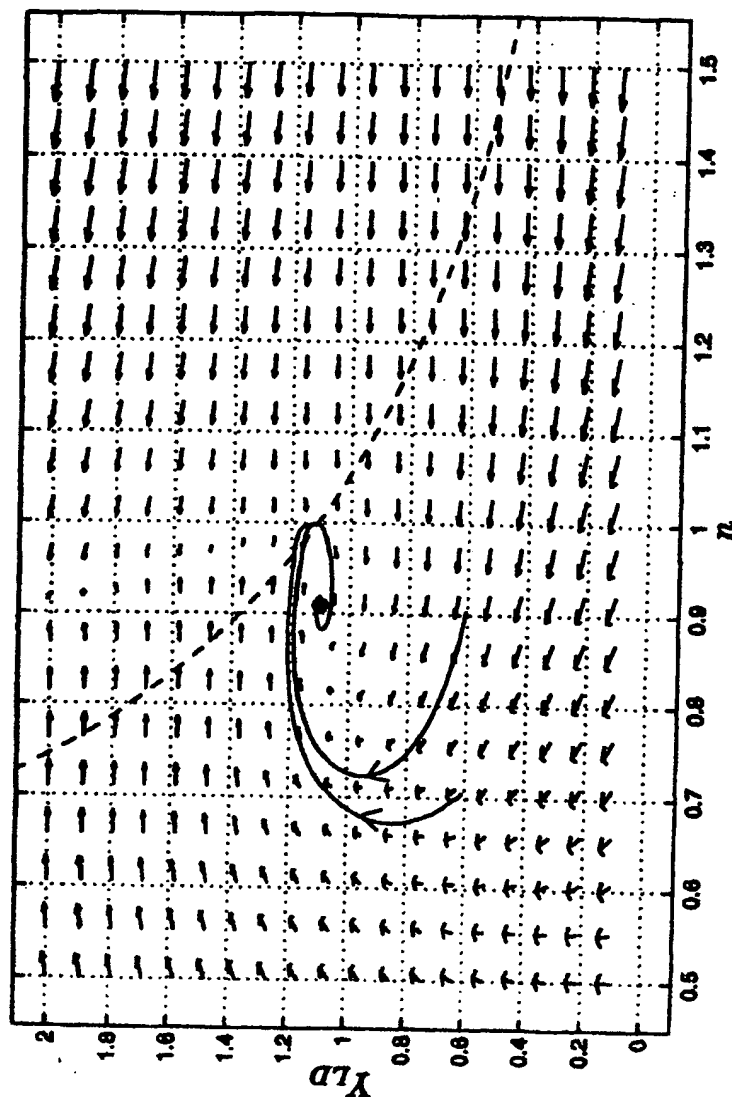

SUBSTITUTE SHEET (RULE 26)

Figure 5: Vector field for the design model consisting of eqs. (1) and (2) with compensation. The dot marks the stable equilibrium point. The dashed curve is the loci for maximum power transfer, .

BEST AVAILABLE COPY

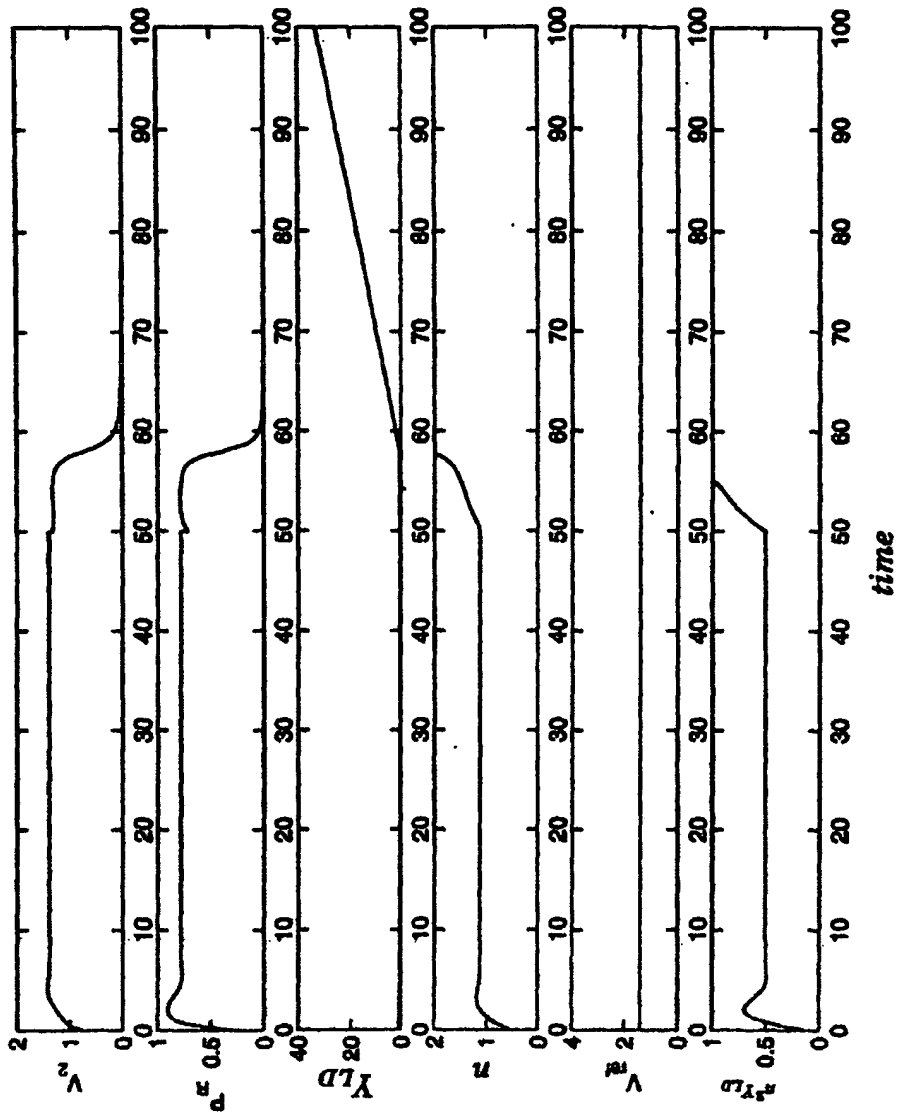

SUBSTITUTE SHEET (RULE 26)

Figure 6: Due to a step change in P_m , the nonlinearity f changes such that the stable equilibrium point is very close to the top and due to the overshoot in V_2 an excursion over the top of f will occur that leads to instability.

BEST AVAILABLE COPY

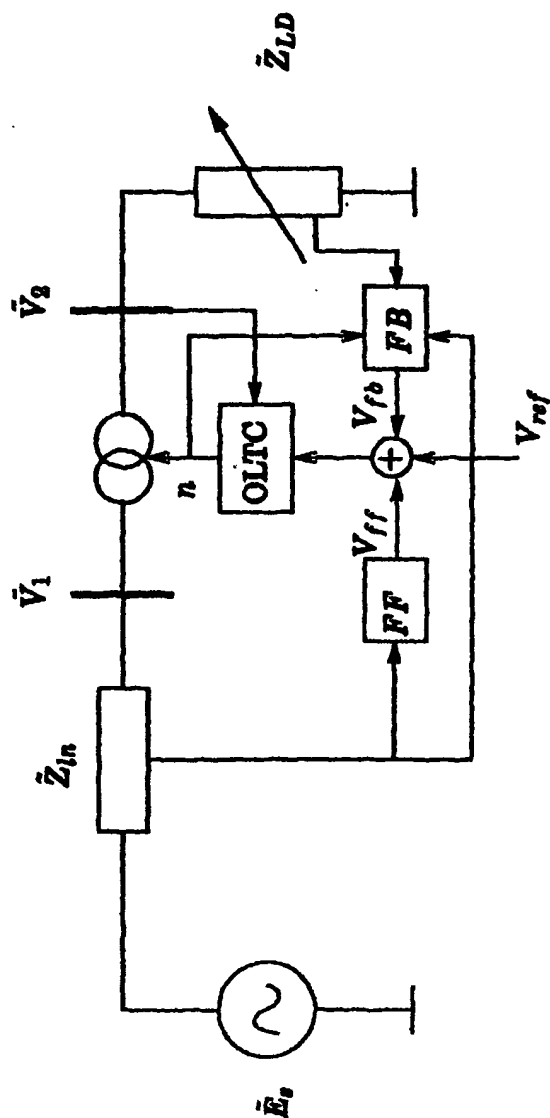


Figure 7: Two-node system with generator, transmission line, transformer and load. Dynamic compensation of the reference voltage is introduced through the blocks FF and FB .

SUBSTITUTE SHEET (RULE 26)

BEST AVAILABLE COPY

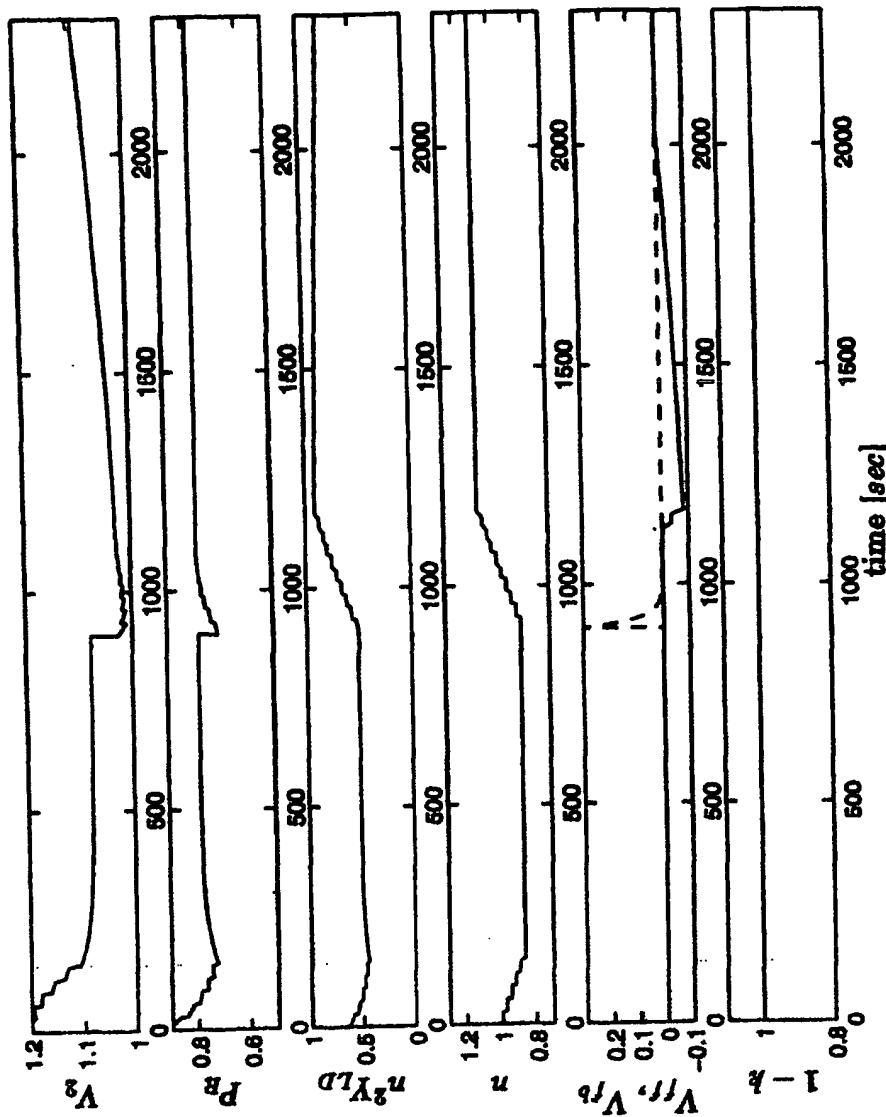


Figure 8: At $t=800$ seconds, a line tripping is simulated by a 20% increase of the line impedance. By momentary changes of the reference value by augmentation with (dashed line) and, stability is maintained without shedding load. In case the reference voltage had been kept constant, the system would become unstable.

SUBSTITUTE SHEET (RULE 26)